

- DC wide range input
- Short circuit, overload, input and output overvoltage protections
- Over temperature protection
- Compact dimension


NOTE

Please refer to the datasheet for more details

Above overcurrent limit, the protection starts cycling in ON/OFF mode(hiccup autoreset), the maximum current supplied depends by the line resistance

Inrush current measured at Un with battery power supply; peak current varies according to the internal impedance of the current source and the resistance of the connections.

The capacitors between phase and neutral, requires that the isolation tests are carried out in DC

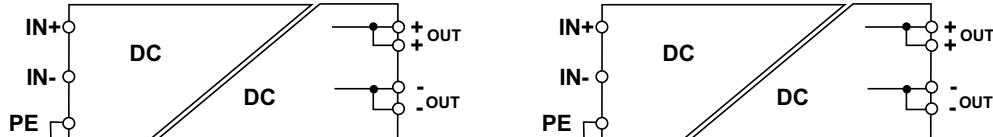

CODE	CSA120BC	XCSA120BC	CSA120CB	XCSA120CB
INPUT TECHNICAL DATA				
Input rated voltage	12 Vdc		24 Vdc	
Input voltage AC	—		—	
Input voltage DC	10.5...18 Vdc		18...36 Vdc	
Frequency	—		—	
Current consumption	10 A [12 Vdc] ±10%		5.1 A [24 Vdc] ±10%	
Inrush peak current	60 A		110 A	
Power factor	—		—	
Internal protection fuse	T 20 A		T 10 A	
External protection on AC line	MCB: C-25 A / Fuse: T-25 A		MCB: C-13 A / Fuse: T-13 A	
OUTPUT TECHNICAL DATA				
Output rated voltage	24 Vdc		12...15 Vdc	
Output adjustable range	22.5...27.5 Vdc		12...15 Vdc	
Continuous current	5 A [24 Vdc]		7 A [12 Vdc]	
Overload limiting	6.5 A		9.1 A	
Short circuit peak current	12 A for 300 ms		15 A for 300 ms	
Ripple @ nominal ratings	100 mVpp		100 mVpp	
Hold up time	1 ms		2 ms	
Status indication	LED "DC OK"		LED "DC OK"	
Alarm contact	—		—	
Parallel connection	possible		possible	
Redundant parallel connection	possible with external ORing diode		possible with external ORing diode	
GENERAL TECHNICAL DATA				
Efficiency	83% [12 Vdc]		85% [24 Vdc]	
Dissipated power	25 W [12 Vdc]		17 W [24 Vdc]	
Operating temperature range	-20...+50°C		-20...+50°C	
Input / output isolation	2.1 kVdc / 60s		2.1 kVdc / 60s	
Input / ground isolation	1.41 kVdc / 60s		1.41 kVdc / 60s	
Output / ground isolation	0.75 kVdc / 60s		0.75 kVdc / 60s	
Standard / approvals	EN 60950-1		EN 60950-1	
EMC Standards	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4		EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4	
Overvoltage category / Pollution degree	II / 2		II / 2	
Protection degree	IP 20		IP 20	
Connection terminal IN/OUT	2.5 mm ² / 2.5 mm ²		2.5 mm ² / 2.5 mm ²	
Housing material	aluminium		aluminium	
Dimension	40x130x115 mm		40x130x115 mm	
Approximate weight	550 g		550 g	
Mounting information	vertical on a rail, 10 mm from adjacent components		vertical on a rail, 10 mm from adjacent components	
APPROVALS				
				
ACCESSORIES				
Mounting rail (IEC60715/TH35-7.5)	PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB		PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB	
Mounting rail (IEC60715/TH35-15)	PR/3/PP, PR/3/PP/ZB, PR/3/PA, PR/3/PA/ZB		PR/3/PP, PR/3/PP/ZB, PR/3/PA, PR/3/PA/ZB	
Marking tag	—		—	